AESPERTO — CUT SHEET

# Aesperto Due

2 groups | $12,900 | made to order, 6-8 weeks

## DECK CUTOUT — PLAN VIEW, COUNTER SURFACE

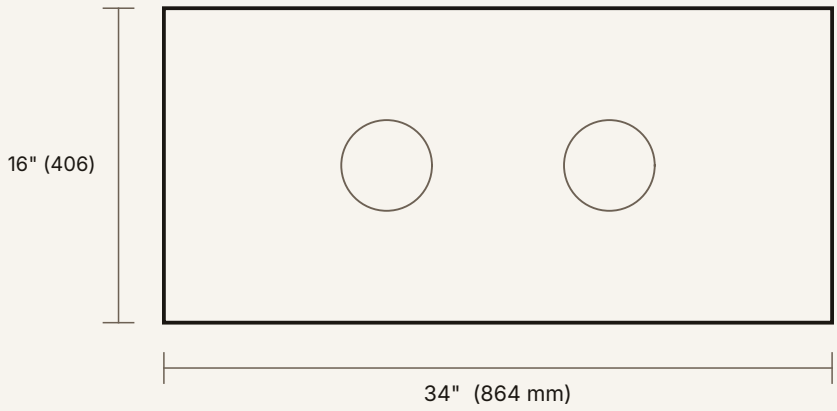


## SPECIFICATIONS

| | |
|---|---|
| DECK CUTOUT | 34" x 16" (864 x 406 mm) |
| UNDER-COUNTER BODY | 32" W x 14" D x 15" H (813 x 356 x 381 mm) |
| BOILERS | Triple - 2 x 1.4 L brew + 6 L steam |
| PUMP | Rotary, 9 bar profiled, per-group PID |
| OUTPUT | ~90 drinks / hour sustained |
| POWER | 208-240 V \| 30 A dedicated \| 4.6 kW |

## SITE REQUIREMENTS

| | |
|---|---|
| COUNTER | Thickness 3/4" - 2 1/2"; wood, quartz, granite, soapstone, stainless or concrete. Deck set flush by Aesperto templating. |
| CABINET BAY | Minimum clearance below deck: 15" H x 14" D. Service access via doors or removable panel. Ventilation: 20 sq in passive or Aesperto fan kit. |
| WATER | Cold line, 3/8" compression, 30-80 psi, shut-off within cabinet. Sorgente™ treatment included; target hardness 50-80 ppm. |
| DRAIN | Gravity drain within 60", or Aesperto pumped drain kit. |
| WARRANTY | 1 year, parts. Installation available nationwide, quoted in writing at site survey. |