AESPERTO — CUT SHEET

Aesperto Tre

3 groups | $14,900 | made to order, 6-8 weeks

DECK CUTOUT — PLAN VIEW, COUNTER SURFACE

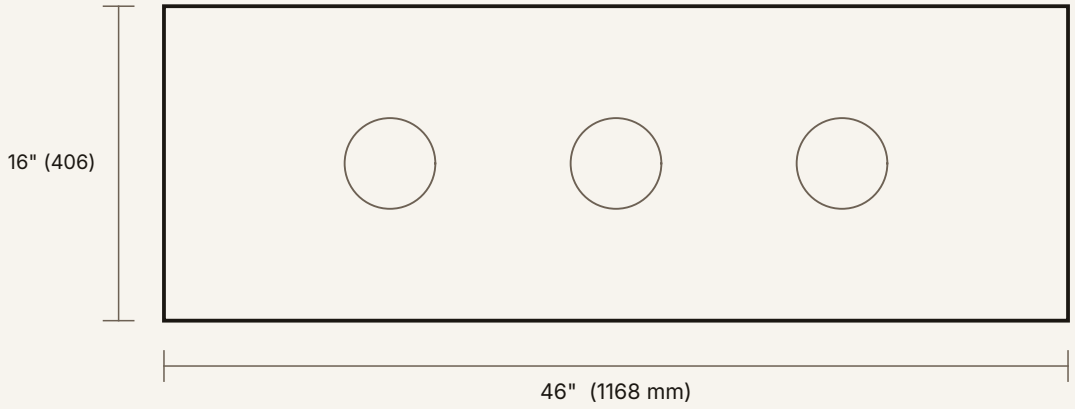

SPECIFICATIONS

DECK CUTOUT	46" x 16" (1168 x 406 mm)
UNDER-COUNTER BODY	44" W x 14" D x 15" H (1118 x 356 x 381 mm)
BOILERS	Quad - 3 x 1.4 L brew + 9 L steam
PUMP	Twin rotary, 9 bar profiled, per-group PID
OUTPUT	~140 drinks / hour sustained
POWER	208-240 V | 40 A dedicated | 6.8 kW

SITE REQUIREMENTS

COUNTER	Thickness 3/4" - 2 1/2"; wood, quartz, granite, soapstone, stainless or concrete. Deck set flush by Aesperto templating.
CABINET BAY	Minimum clearance below deck: 15" H x 14" D. Service access via doors or removable panel. Ventilation: 20 sq in passive or Aesperto fan kit.
WATER	Cold line, 3/8" compression, 30-80 psi, shut-off within cabinet. Sorgente™ treatment included; target hardness 50-80 ppm.
DRAIN	Gravity drain within 60", or Aesperto pumped drain kit.
WARRANTY	1 year, parts. Installation available nationwide, quoted in writing at site survey.