AESPERTO — CUT SHEET

Aesperto Uno

1 group | $9,900 | made to order, 6-8 weeks

DECK CUTOUT — PLAN VIEW, COUNTER SURFACE

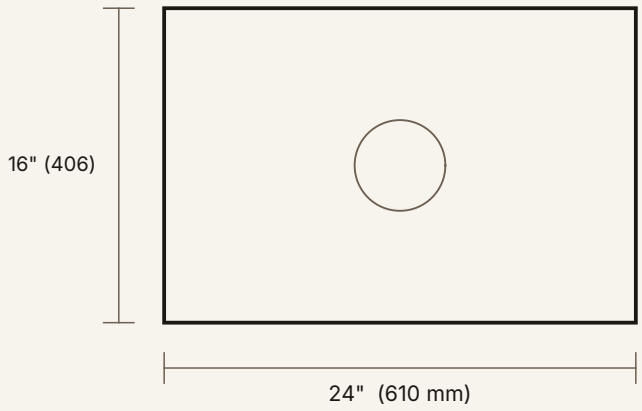

SPECIFICATIONS

DECK CUTOUT	24" x 16" (610 x 406 mm)
UNDER-COUNTER BODY	22" W x 14" D x 15" H (559 x 356 x 381 mm)
BOILERS	Dual - 1.4 L brew + 3.5 L steam
PUMP	Rotary, 9 bar profiled
OUTPUT	~45 drinks / hour sustained
POWER	110-120 V | 20 A dedicated | 2.4 kW

SITE REQUIREMENTS

COUNTER	Thickness 3/4" - 2 1/2"; wood, quartz, granite, soapstone, stainless or concrete. Deck set flush by Aesperto templating.
CABINET BAY	Minimum clearance below deck: 15" H x 14" D. Service access via doors or removable panel. Ventilation: 20 sq in passive or Aesperto fan kit.
WATER	Cold line, 3/8" compression, 30-80 psi, shut-off within cabinet. Sorgente™ treatment included; target hardness 50-80 ppm.
DRAIN	Gravity drain within 60", or Aesperto pumped drain kit.
WARRANTY	1 year, parts. Installation available nationwide, quoted in writing at site survey.